

Quantum MP Ratings and Dimensions

Ratings

Model	Frame	Armature Current (A)*	Field Current (A)	Quadrants of Operation
480V - EN / IEC; cULus				
QMP45A4(R)	1A	45	8	2 and 4
QMP75A4(R)		75		
QMP155A4(R)	1B	155	8	2 and 4
QMP210A4(R)		210		
QMP350A4(R)	2A	350	20	2 and 4
QMP400A4(R)		400		
QMP550A4(R)**		550		
QMP700A4(R)**	2B	700	20	2 and 4

*Current ratings are at 104 °F (40 °C) with 150% overload for 30s. (R) indicates optional order code for 4-quadrant operation.


**These models do not include dynamic braking contactors.

Dimensions



Frame Size	Height (H)		Width (W)		Depth (D)	
	in	mm	in	mm	in	mm
1A	22.6	573	13.0	330	8.7	272
1B	22.8	578	13.0	330	9.9	251
2A	35.0	889	20.3	516	13.0	330
2B	36.0	915	20.3	516	15.0	381

Order String¹

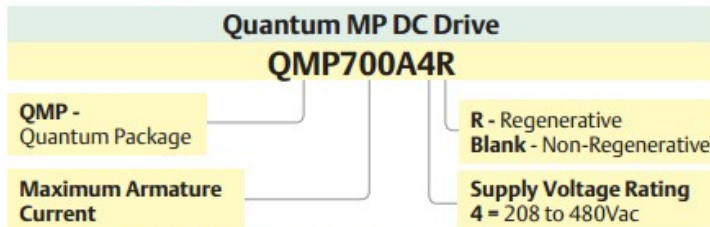

¹NOTE: Order strings do not include drive keypad. Refer to page 7 for keypad order codes.